

Product search

MDIC LSZH

MDIC LSZH - Indoor Access Cable

Micro Drop Installation Cable, special Access cable with low bend radius, no waterpeak G657.A fibres. Ruggedized construction with excellent installation performance, easy strippable for fast installation. This cable solves all in-house installation problems.

Characteristics	Properties	Unit
Product group	Signal and Communication Cables	
Series	Glasvezelkabel Single Mode	
Type	MDIC LSZH	
Application	Inside	
Cable metal free	Yes	
Strain relief	Yes	
UV resistant	Yes	
Halogen free (acc. EN 50267-2-2)	Yes	
Type of tube	Other	
Fibre Type	Single mode	
Optical fibre standard	ITU-T G.657.A	
Material outer sheath	LSZH	
Colour outer sheath	White	
Model	Double sided Ripcord	
Tensile load	90	N
Installation temperature	-10 / 50	°C
Operation temperature range	-30 / 70	°C
Transportation and storage temperature	-30 / 70	°C
Construction and Colour codes	zie bijlagen	



Art. Number TKF	Construction	Dimension (height -)	Net weight (kg/km)	Bending radius installed	Bending radius at	Tensile load (N)
69271	2 x Single mode	2,0 - 3,1	11	15	30	90




Product information

Cable construction and colour code

MDIC LSZH

Indoor FO drop cable with easy fibre access

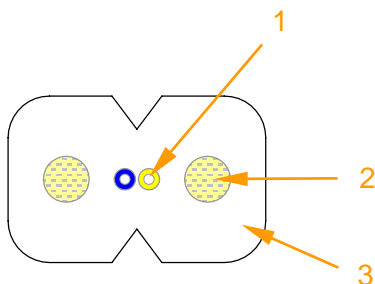

Description:

- 1 Optical fibres
- 2 Longitudinal non-metallic strength members
- 3 Outer sheath (LSZH)

Standard Colours:

item	colour
Fibre #1	Blue
Fibre #2	Yellow
Outer sheath	White