

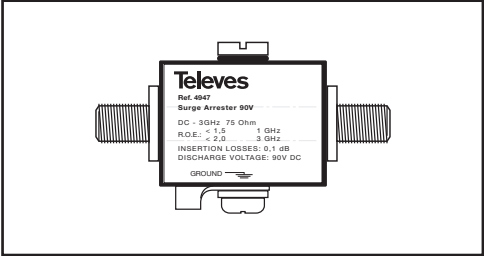


Margen de frecuencia <i>Gama de frequência</i> Frequency margin	0 - 3000 MHz
Pérdidas de inserción <i>Perdas de inserção</i> Insertion losses	0.1 dB
Tensión de descarga <i>Tensão de descarga</i> Discharge voltage	90V DC
Conectores <i>Conectores</i> Connectors	"F" hembra "F" fema "F" female
Impedancia <i>Impedância</i> Impedance	75 ohm

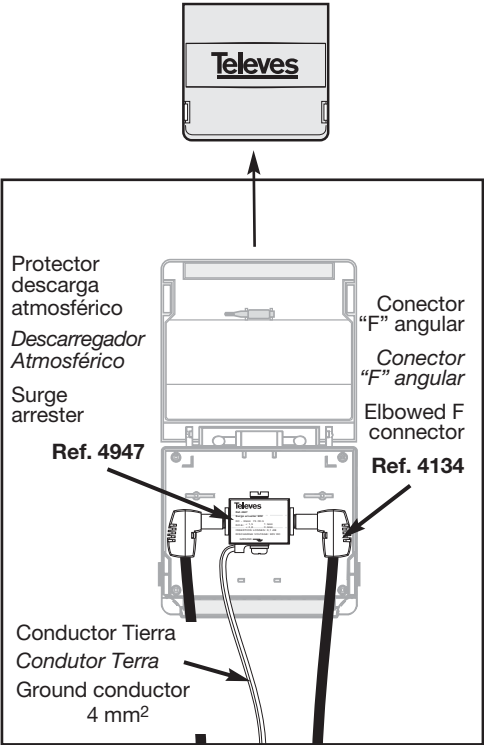


Caixa de exterior para mástil
Caixa de exterior p/ mastro
Weatherproof case

Ref. 4163

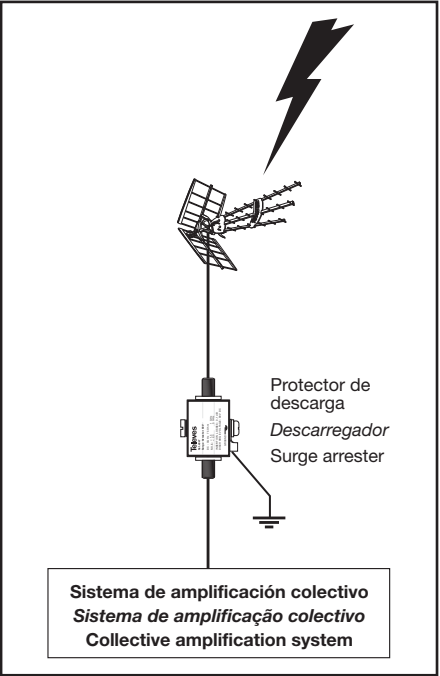

Marge de fréquence <i>Margen de frecuencia</i>	0 - 3000 MHz
Perte d'insertion <i>Perdita di passaggio</i>	0.1 dB
Tension de décharge <i>Tensione di scariche</i>	90V DC
Connecteurs <i>Connettori</i>	"F" hembra "F" fema
Impédance <i>Impedenza</i>	75 ohm

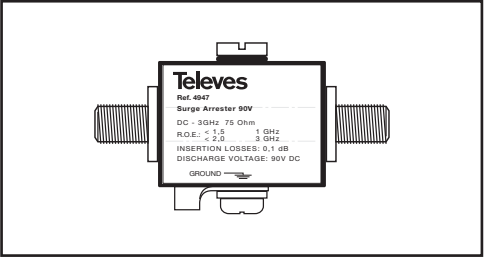

Boîtier extérieur de mât
Scatola da esterno per palo **Ref. 4163**

